



Shaft cutout sizes

Clear space required for lift unit not in a shaft by others

Door front cutout sizes		
Landing	Width	Height
A 1	1500	2250
A 2	1500	2250


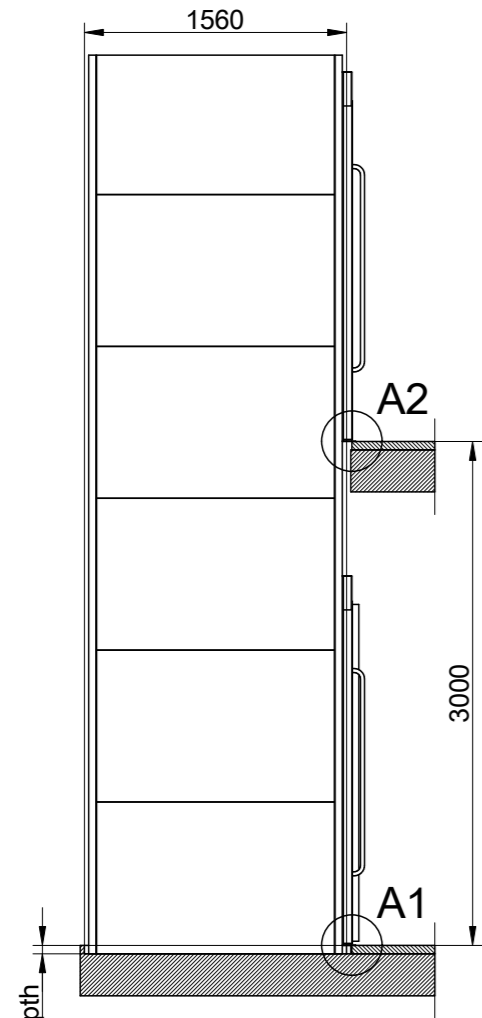


Section E-E

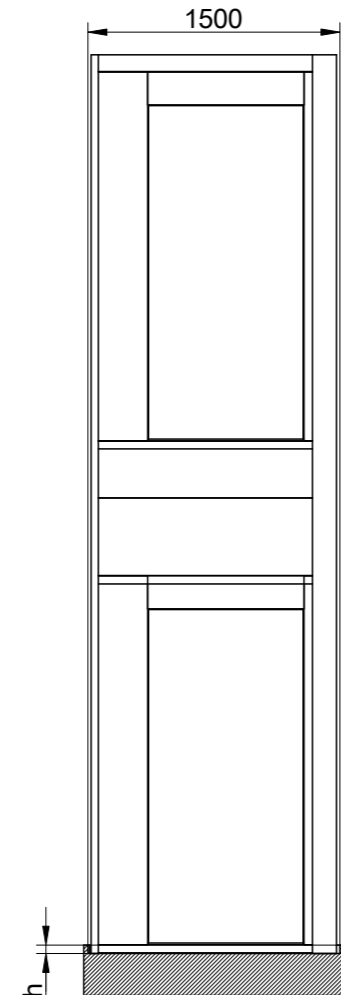


Section G-G



50 mm pit depth + 10 mm, - 0 mm.
Bottom surface must be flat

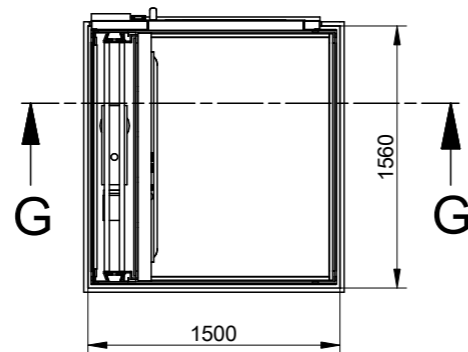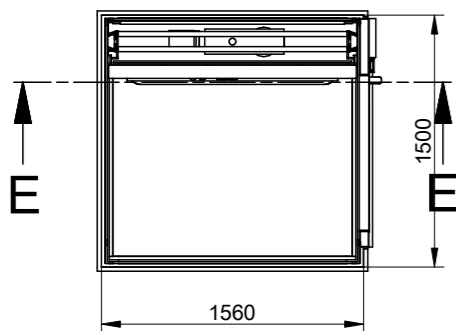

A2 (1:5)



A1 (1:5)

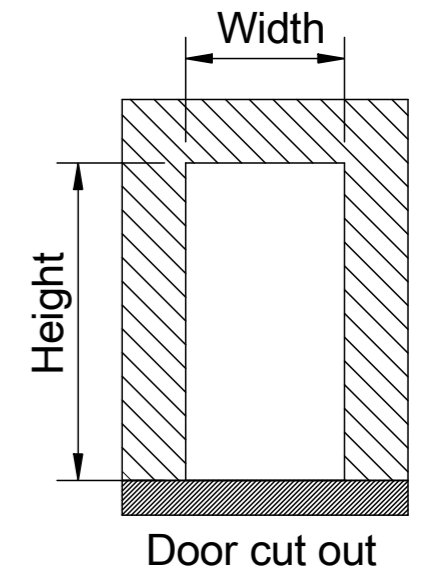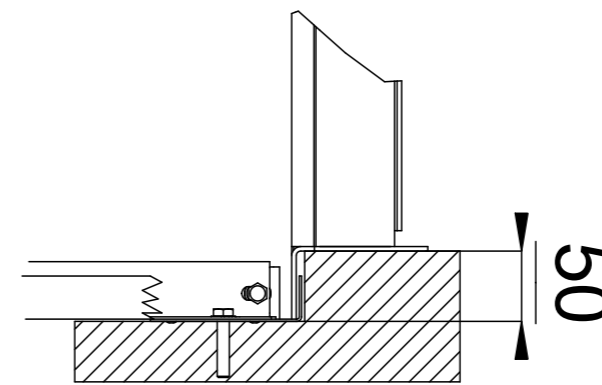


Door cut out

Incoming power supply is connected at landing: 1, side A

The following signals may be forwarded from the lift:
-Emergency signal: On the alarm pcb, the circuit between position 1 and position 2 on terminal board 4, is closed when the yellow alarm button is activated for 10 seconds.

-Summary alarm: Any operational errors (8 different) can be forwarded to a local alarm central or reception from terminal board 3, spaces 14 (N.C.), 15 (N.O.) and 16 (COM) on the alarm pcb.

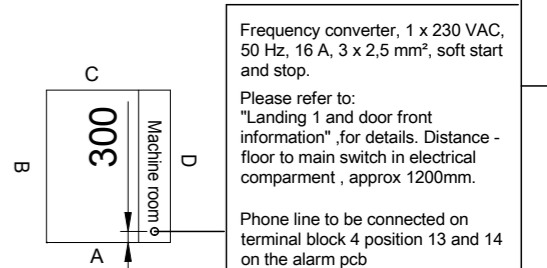


Frequency converter, 1 x 230 VAC, 50 Hz, 16 A, 3 x 2,5 mm², soft start and stop.

Please refer to: "Landing 1 and door front information" for details. Distance - floor to main switch in electrical compartment, approx 1200mm.

Phone line to be connected on terminal block 4 position 13 and 14 on the alarm pcb

Approved by builder:



Tender no
154846-K

Order no

Principal drawing

A4 - 1100*1467

Cut out sizes
Kaksi pysähdystasoa - Ovet samalla sivulla
Lavakoko 1100 mm x 1500 mm

Gen. Tolerances

SS-ISO 27681-1 m

Date

2017-02-20

sheet

2 of 6

Scale:

A3, 1:45

European view placement:

